

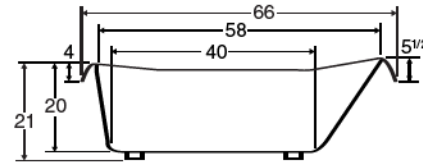


Always check our website for the most updated specifications: www.americh.com

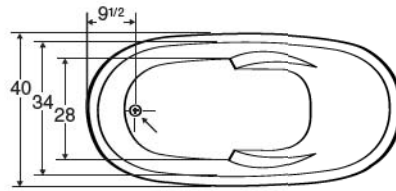

Tub pictured with optional waste & overflow.

All bathtub dimensions are ± 1/2”.

CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

DIMENSIONS

66” x 40” x 20” deep (1676 x 1016 x 508 mm)
 Whirlpool Operating Gallons = 70 (Liters = 308)
 Gallons to Overflow = 100 (Liters = 440)


ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.


Builder Series

N/A


Luxury Series




Platinum Series




Combination
(pump and blower location only)



Airbath System II



Airbath System III



LEGEND:

- PUMP
- BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" x 20")

A C C E S S O R I E S													
Apron	Grab Bars					Pillow				Neck Massage	Tile Flange	Installation	
	9"	14"	16"	Madison	Rail	13"	17"	Angle	Head Support Systems			Deck Mount	Undermount
	•	•	•			•						Yes	No

• = option is available ■ = standard on Platinum Series □ = option is not available

INSTALLATION TIPS

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2” higher than stated.
- All whirlpool or Airbath™ unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- For oval or specialty shapes. Americh recommends you wait until you have the actual unit or contact us for a template.