



Always check the website for the most updated specifications: [www.americh.com](http://www.americh.com)

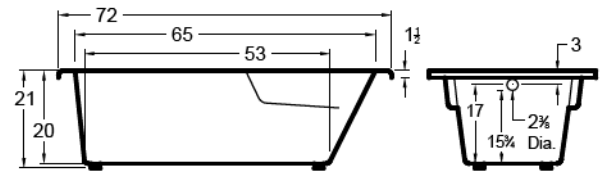

Tub pictured with optional grab bars and waste & overflow.



All bathtub dimensions are  $\pm 1/2"$ .

### CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

### MATERIAL

Acrylic

### DIMENSIONS

72" x 34" x 21" (1829 x 864 x 533 mm)


Whirlpool Operating Gallons = 45 (Liters = 170)

Gallon to Overflow = 75 (Liters = 284)


### ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.


### Builder Series



### Luxury Series




### Platinum Series




### Combination


(pump and blower location only)



### Airbath System II



### Airbath System III



LEGEND:

- P PUMP
- B BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" X 20")

## ACCESSORIES

| Apron | Grab Bars |     |     |         |      | Pillow |     |       |                     | Tile Flange | Installation |            |
|-------|-----------|-----|-----|---------|------|--------|-----|-------|---------------------|-------------|--------------|------------|
|       | 9"        | 14" | 16" | Madison | Rail | 13"    | 17" | Angle | Head Support System |             | Deckmount    | Undermount |
| •     |           |     |     | •       | •    | •      |     | •     | •                   | •           | Yes          | Yes        |

= option is available    
 = standard on Platinum Series    
 = option is not available

### INSTALLATION TIPS

- Install product according to Owners Manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Dimensions for undermount installation should be taken directly from the bathtub.
- Cut-out dimension: 70" x 32"