


Always check the website for the most updated specifications: www.americh.com



Tub pictured with optional grab bars and waste & overflow.

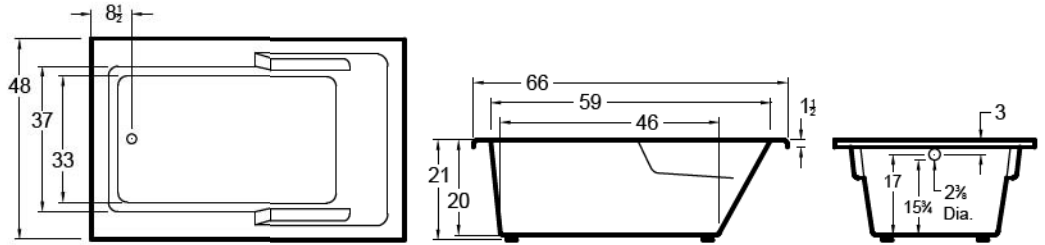

All bathtub dimensions are $\pm 1/2"$.

CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

MATERIAL

Acrylic


DIMENSIONS

66" x 48" x 21" (1676 x 1219 x 533 mm)
 Whirlpool Operating Gallons = 70 (Liters = 265)
 Gallon to Overflow = 110 (Liters = 416)


ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.


Builder Series




Luxury Series




Platinum Series




Combination (pump and blower location only)



Airbath System II



Airbath System III



LEGEND:

- P PUMP
- B BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" X 20")

ACCESSORIES

| Apron | Grab Bars | | | | | Pillow | | | | Tile Flange | Installation | |
|-------|-----------|-----|-----|---------|------|--------|-----|-------|---------------------|-------------|--------------|------------|
| | 9" | 14" | 16" | Madison | Rail | 13" | 17" | Angle | Head Support System | | Deckmount | Undermount |
| • | | | | • | • | • | | • | • | • | Yes | Yes |

= option is available
 = standard on Platinum Series
 = option is not available

INSTALLATION TIPS

- Install product according to Owners Manual and local codes.
- All units with an Airbath III may be 1 1/2 - 2 1/2" higher than stated.
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Dimensions for undermount installation should be taken directly from the bathtub.
- Cut-out dimension: 64" x 46"